

## DS-KH6310/DS-KH6310-W


### Video Intercom Indoor Station with 7-inch Touch Screen

#### Key Features

- Video intercom function
- Remote unlocking function
- Resident-to-resident video call
- Live view of HD video
- Voice message function
- Auto-respond and no disturbing mode
- Noise suppression and echo cancellation
- 8-ch zone alarm and SOS calling function
- Community notice
- Convenient installation with the bracket, batch configuration, and power over video/audio distributor (DS-KAD606, DS-KAD612)



#### Typical Application

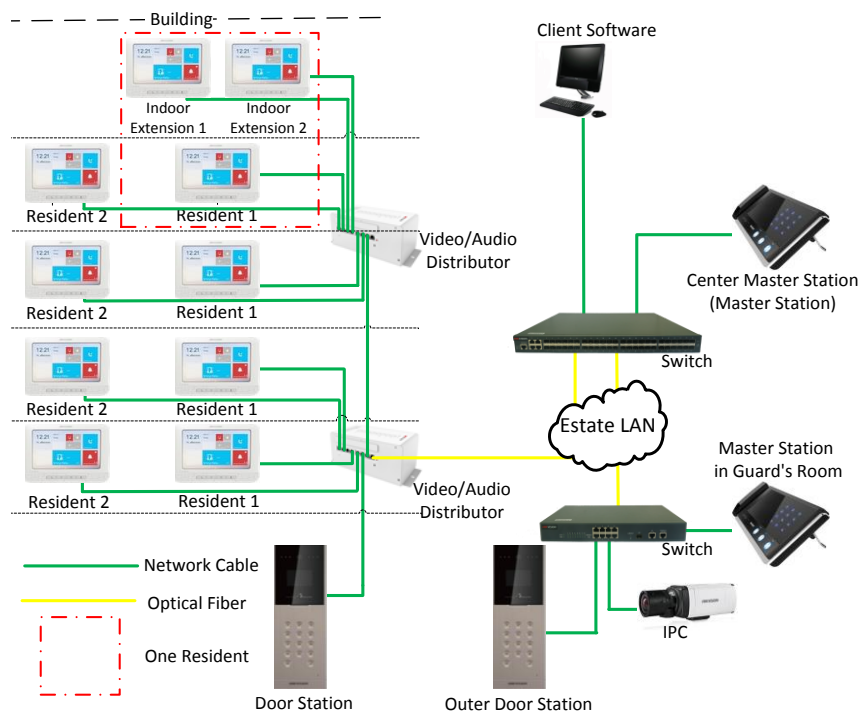


## Specifications

Model	DS-KH6310	DS-KH6310-W
<b>System parameters</b>	<b>Processor</b>	High-Performance Embedded SOC Processor
	<b>Operation system</b>	Embedded Linux Operation System
<b>Display parameters</b>	<b>Display screen</b>	7-Inch Colorful TFT LCD
	<b>Display resolution</b>	800 × 480
	<b>Operation method</b>	Capacitive Touch Screen, Physical Button
	<b>Operation interface</b>	Flattened UI Operation Interface
<b>Audio parameters</b>	<b>Audio input</b>	Built-in Omnidirectional Microphone
	<b>Audio output</b>	Built-in Loudspeaker
	<b>Audio compression standard</b>	G.711 U
	<b>Audio compression rate</b>	64 Kbps
	<b>Audio quality</b>	Noise Suppression and Echo Cancellation
<b>Network parameters</b>	<b>Ethernet</b>	10/100 Mbps Self-Adaptive Ethernet
	<b>Network protocol</b>	TCP/IP, SNMP, SIP, RTSP
<b>Alarm parameters</b>	<b>Alarm input</b>	8-ch Alarm Input Sensor
<b>Device interfaces</b>	<b>Network interface</b>	1 RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface
	<b>RS-485</b>	1 RS-485 Half-Duplex Port
	<b>I/O output</b>	1
<b>General</b>	<b>Power supply</b>	24 VDC, Power Over Network Cable (DS-KAD606, DS-KAD612)
		12 VDC
	<b>Power consumption</b>	≤10 W
	<b>Working temperature</b>	-10° C to + 55° C (14° F to 131° F)
	<b>Working humidity</b>	10% to 90%
	<b>Dimensions (L × W × H)</b>	195.8 mm × 132.8 mm × 17.5 mm (7.7" × 5.2" × 0.7")
	<b>Certification</b>	FCC, IC, CE, C-TICK, ROHS, REACH, WEEE

## Available Models

DS-KH6310, DS-KH6310-W

## Appearance and Interfaces

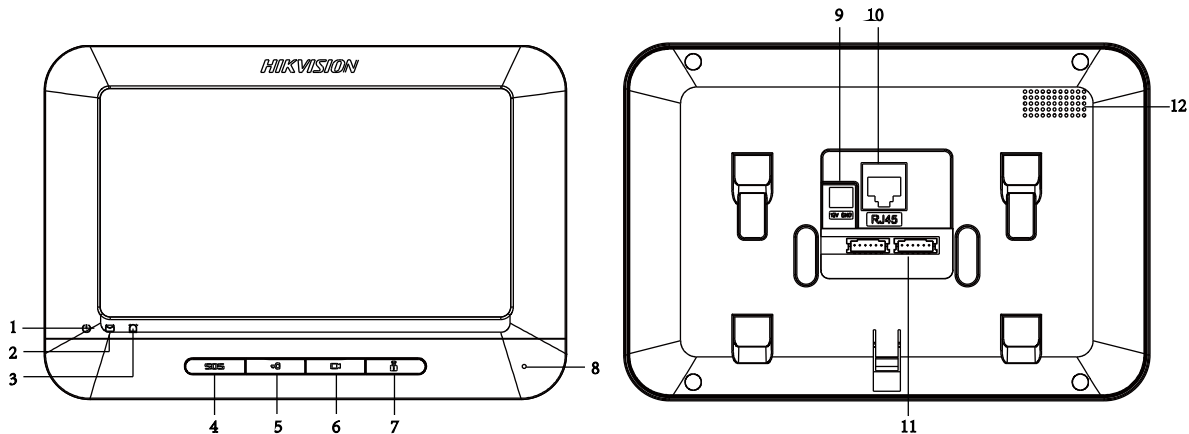

Index	Description	Index	Description
1	Power Supply Indicator	7	Management Center Key
2	Information Indicator	8	Microphone
3	Alarm Indicator	9	12 VDC Power Supply
4	SOS Key	10	Network Interface
5	Unlock Key	11	Terminals and Interfaces of Cables
6	Live View Key	12	Loudspeaker

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com