







DH-DVR0804LE-S: 8 channel video inputs, 8 channel audio inputs, 8 channel loop outputs and 1 channel matrix output. The 1st video channel can support max D1(4CIF) realtime recording and other channels can support CIF realtime recording. It can support VGA, HDMI, eSATA, USB2.0 and 4 HDDs.


8CH


H.264


Max 400/480fps


8CH


Max 8TB HDD

1920x1080
HDMI / VGA




Features

- 8 channels high performance standalone DVR
 - Up to 8 cameras with full HD 1080P display
 - H.264 video compression algorithm ideal
 - Each channel at CIF and special channel at D1 recording
 - Dual encoding streams supported
 - TV(BNC)/VGA/HDMI synchronous video output
 - live, recording, playback, backup & remote access

- 8 channel simultaneous playback
 - Smart video detection: MD, camera blank, video loss
 - 3D intelligent positioning with DAHUA PTZ dome
 - Easy backup: USB devices, CD/DVD-RW & network download
 - Alarm triggering screen tips, buzzer, PTZ, e-mail, FTP upload
 - Up to 4 SATA HDDs & CD/DVD-RW, 1 eSATA, 2 USB2.0
 - Built-in web server, multi-DVR client, MSS & CMS

System Connection

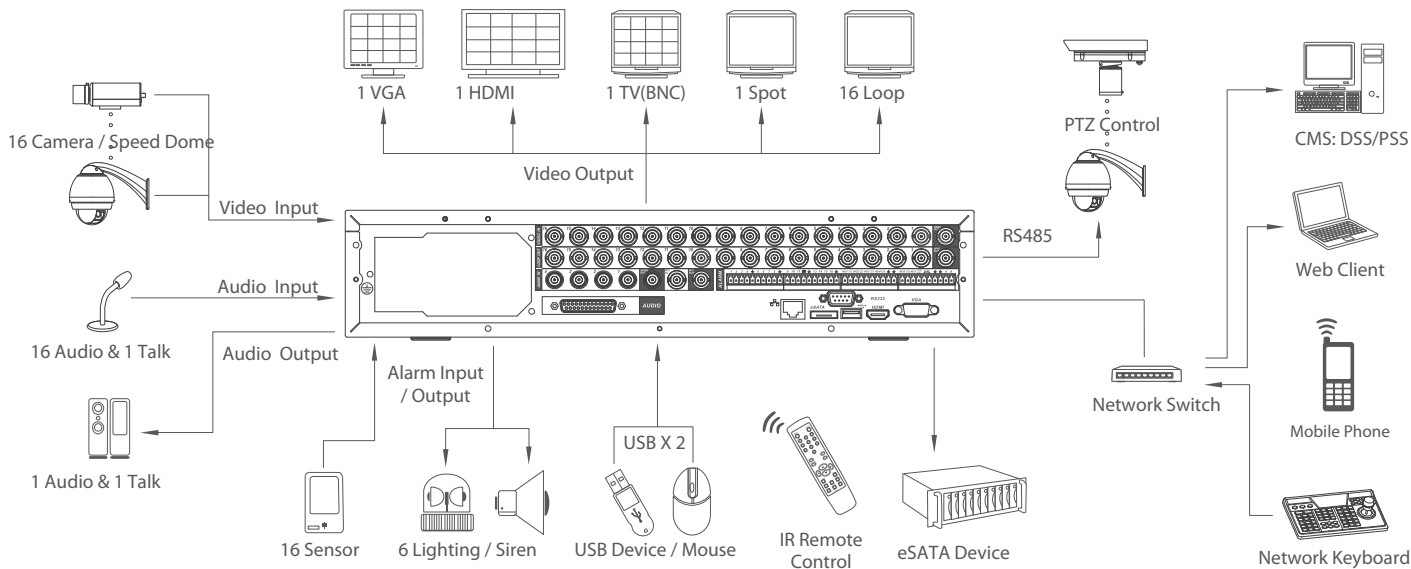

Specifications

Model		DH-DVR0804LE-S
System	Main Processor	High performance embedded microprocessor
	Operating System	Embedded LINUX
	System Resources	Pentaplex function: live, recording, playback, backup & remote access
	Control Mode	Front panel, USB mouse, IR remote control, Keyboard, Network
Video	Input	8 channel, BNC(1.0Vp-p, 75Ω)
	Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)
	Output	1 TV, 1 Spot, BNC(1.0Vp-p, 75Ω), 1 VGA, 1 HDMI
	Loop Output	8 channel
Audio	Input	8 channel, BNC(200-2800mV, 30KΩ)
	Output	1 channel, BNC(200-3000mV, 5KΩ)
	Bidirectional Talk	1 channel Input, BNC(200-2800mV, 30KΩ), 1 channel Output, BNC(200-3000mV, 5KΩ)
Display	Display Split	1/4/8/9
	Resolution	1920×1080, 1280×1024, 1280×720, 1024×768, 800×600
	Tour Display	Support
	Privacy Masking	4 self-defined four-sided zones for privacy masking for each camera
	OSD	Camera title, time, video loss, camera lock, motion detection, recording
Recording	Video/Audio Compression	H.264 / G.711
	Image Resolution	D1/4CIF(704×576/704×480) / CIF(352×288/352×240) / QCIF(176×144/176×120)
	Encoding Speed	Main Stream:
		Channel 1: D1/CIF/QCIF (1~25/30fps) / Channel 2~8: CIF/QCIF (1~25/30fps), D1 (1~6/7fps)
		Extra Stream: QCIF(1~25/30fps) , CIF (1~6/7fps)
	Bit Rate	32~2048Kb/s
	Image Quality	1~6 level(level 6 is the best, VBR effectively)
	Recording Mode	Manual, Schedule(Regular(Continuous), MD(Video detection: Motion detection, Camera blank
		Video loss), Alarm), Stop
Video Detection & Alarm	Recording Priority	Manual >Alarm >MD >Regular
	Recording Interval	1~120 min. (default: 60 min.), Pre-record: 1~30 sec., Post-record: 10~300 sec.
	Trigger Events	Recording, PTZ movement, Tour, Alarm, Email, Spot output
	Motion Detection	Zones: 396(22×18), Sensitivity: 1~6 (level 6 is highest)
	Video Loss & Camera Blank	Support
	Alarm Input	8 channel
Playback & Backup	Relay Output	6 channel
	Playback Channel	1/2/4/All
	Search Mode	Time/Date, Alarm, Motion Detection & Exact search (accurate to second)
	Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera
		Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom(any size)
Network	Backup Mode	Flash drive/ USB HDD/ USB CD/DVD-RW / eSATA Device / Built-in SATA burner/ Network download
	Ethernet	RJ-45 port (10/100M)
	Network Functions	TCP/IP, UDP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Email, Alarm Server
Hard Disk	Remote Operation	Monitor, PTZ control, Playback, System setting, File download, Log information
	Hard Disk	4 SATA ports, 4 HDDs or 3 HDDs + 1 CD/DVD-RW, Max 2TB per HDD supported
	Space Occupation	Audio: 28.8MB/H, Video: 56~500MB/H
Auxiliary Interface	HDD Management	Hard disk hibernation technology, HDD faulty alarm & Raid(Redundancy)
	USB Interface	2 ports, 1 for mouse control, 1 for backup
	eSATA	1 port
	RS232	Dahua keyboard, PC communication
Environmental	RS485	PTZ control
	Power Supply	AC 100~240 V, 50/60 Hz
	Power Consumption	30W
	Working Environment	-10~+55°C / 10~90%RH / 86~106kpa
	Dimension	2U, 440mm×460mm×89mm(W×D×H)
	Weight	6.5KG(without HDD)